
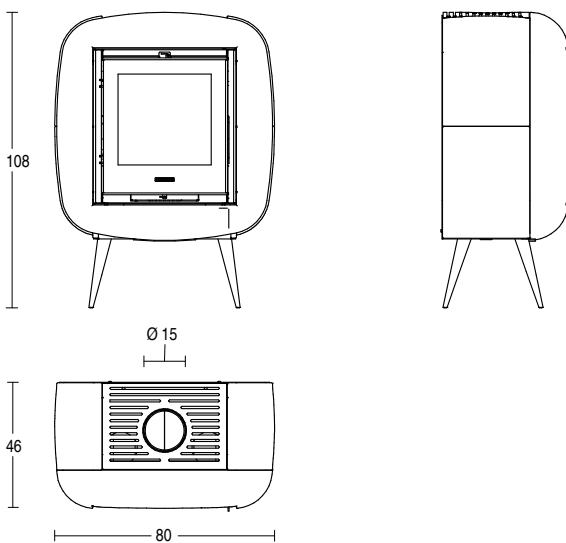


WOOD-BURNING STOVES

BONNY



TECHNICAL DATA

		Version 9,0 kW	Version 7,0 kW
• Room heating capacity (min - max) *	m³	150 - 260	120 - 200
• Firebox heat output	kW	11,1	8,6
• Nominal heat output	kW	9,0	7,0
• Nominal thermal efficiency	%	80,5	80,5
• Nominal consumption	kg/h	2,7	2,1
• Standard flue outlet Ø	cm	15	
• Dimensions W x D x H	cm	80 x 46 x 108	
• Stove weight	kg	164	

GENERAL CHARACTERISTICS

• Cladding	Majolica
• Stove	steel
• Firebox	Aluker®
• Baffle plate	Aluker®
• Brazier	cast iron
• Ash drawer	removable
• Door	cast iron
• Door handle	detachable
• Standard flue outlet position	top
• Humidifier	steel
• Ceramic glass	self-cleaning and resistant up to 750°C
• Glass cleaning system	Air Glass
• Primary and secondary air	adjustable
• Pre-set tertiary air	pre-heated
• Multifuoco System® with remote control	optional
• Multifuoco System Plus with LCD remote control	optional
• Installation ***	wall - corner

* The heating capacity value is calculated based on nominal heat output and refers to rooms with a thermal requirement between 0.060 and 0.035 kW per m³.

*** Please refer to the instruction manual for details regarding the installation type.

Data obtained under laboratory conditions using beech wood with moisture content below 20%. Consumptions may vary according to the dimensions and the type of wood used.