



E927 D

The decoration embellishes the clear-out cladding of this stove, which blends in well with current furnishings

COLOURS



GENERAL TECHNICAL CHARACTERISTICS

Natural heating distribution

Radiant, conduction and natural convection heating

Multifuoco System Plus

Optional forced ventilation kit with four electronic controlled power levels and LCD remote control.

Warm air ducting up to 10 m

Heating with Multifuoco System®

Optional four speed forced ventilation kit with remote control.

Warm air ducting up to 10 m

Tertiary air system

Better performances. The preheated tertiary air system fully optimizes combustion and ensures high efficiency with low emission into the atmosphere.

Structure

Enamelled steel with door and grate in cast iron, firebox in Aluke®

Majolica cladding

Unique large hand-made pieces

Air Glass System

Self-cleaning ceramic glass resistant up to 750°C


Easy Cleaning

Quick and easy maintenance, removable ash drawer

Wellness

Humidifier with aroma diffuser

TECHNICAL DRAWING

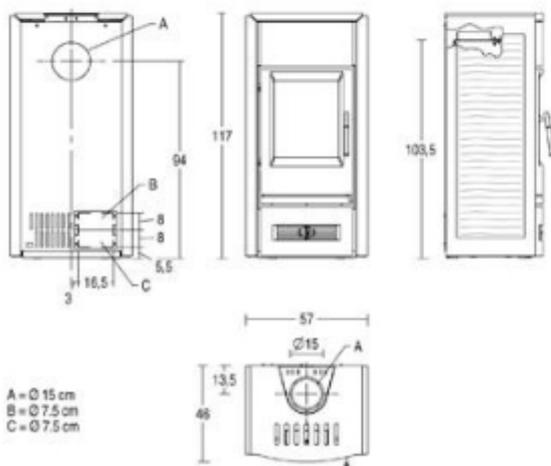

TECHNICAL DATA

Room heating capacity (m ³ in-max)	m ²	140 - 235
Nominal thermal efficiency	%	80,8
Rated heat output	kW	8,2
Consumption at rated heat output	Kg/h	2,0
Maximum heat output	kW	10,0
Maximum consumption		2,9
Dimensions WxDxH	cm	57x46x117
Cladding		majolica
Front		steel
Firebox		enamelled steel
Primary and secondary air		adjustable
Tertiary air		predetermined and pre-heated
Air combustion kit		optional
Firebox		Aluke®
Brazier		cast iron
Flue outlet Ø	cm	15, top or rear
Ash drawer		removable
Door		cast iron
Ceramic glass		self-cleaning resistant up to 750°C
Door handle		steel handle with silicon sleeve
Wellness-humidifier in stainless steel		yes
Oven in stainless steel (LxWxH)	cm	no
Multifuoco System®		optional, 4 levels
Multifuoco System Plus		optional, 4 levels speed
Front air vent adjustable		yes - yes
Forced Convection kit		no
Total weight	Kg	

The availability of models may vary from Country to Country.